
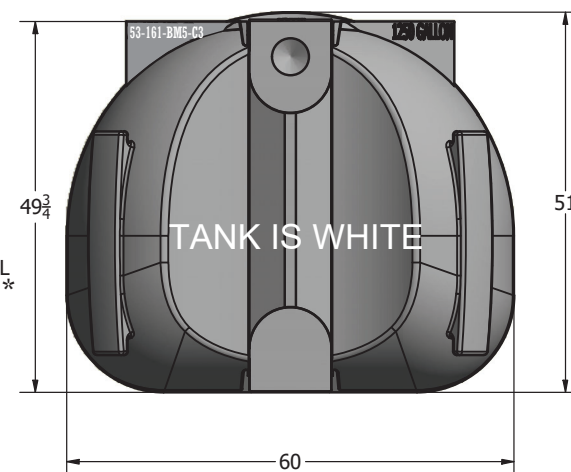


Florida Department of Environmental Protection
 Approved 10/22/2025
 53-161-BM5-C3
 Polyethylene; Snyder Industries "1250 Gallon D2"; Norwesco "1250
 Gallon Low Profile modified with a different location of the slide-in
 baffle. Houses the BioMicrobics MicroFAST 0.5 Flex (500 GPD) ATU
 NSF 245 certified. White color.

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
all	01	Relocate baffle for NSF 40 & 245; insert MF 0.5 FLEX; notes for FL	10/06/25	mdrpe

Mark D.
 Repasky PE

Digitally signed by
 Mark D. Repasky PE
 Date: 2025.10.07
 16:43:42 -04'00'

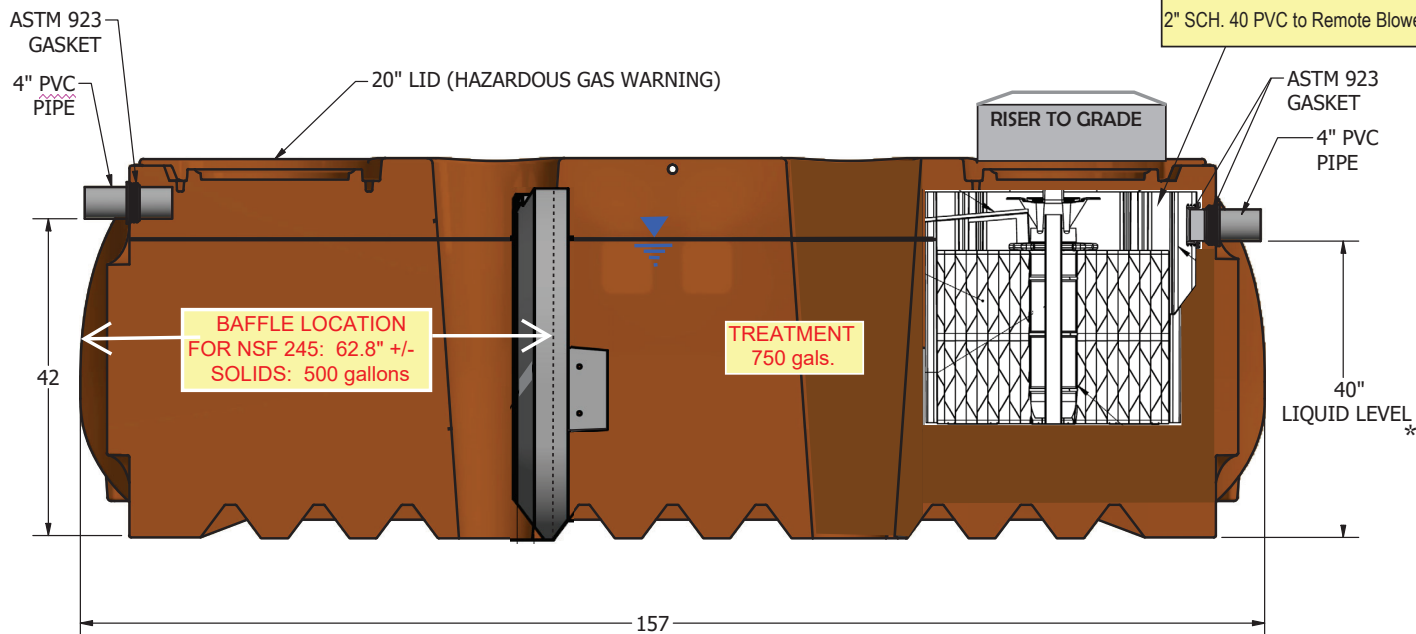

MATERIAL: HIGH-DENSITY POLYETHYLENE EXXON 8512
 WALL THICKNESS: TANK - 0.250" BAFFLE - 0.19"

NSF 245:	REQUIRED	PROVIDED
Chamber	gallons	gallons
Solids	475	500
Treatment	713	750
Total	1188	1250

ALL DIMENSIONS ARE IN INCHES, NOMINAL.
 ALL DIMENSIONS ON ROTATIONAL MOLDED PARTS ARE SUBJECT TO A $\pm$ 3% TOLERANCE.

3096 S. Adams Street Tallahassee, FL 32301 repaskymd@aol.com 850-251-7743
 This item digitally signed and sealed by Mark D. Repasky, PE, on date noted. Printed
 copies of this document are not considered signed and sealed and the signature must
 be verified on any electronic copies.

DRAWN Todd Bolzer	7/28/2015	NORWESCO	
CHECKED		NORWESCO, INC., ST. BONIFACIUS, MN	
QA		FLORIDA: DURA-CAST 56-161-BM5-C3	
MFG		MicroFAST 0.5 FLEX 500 GPD	
APPROVED		Meets NSF 40 and 245 WHITE TANK	
SIZE B		DWG NO 1250 Gallon (FL)	REV 10-06-2025
SCALE: 1/16		SHEET 1 OF 3	