



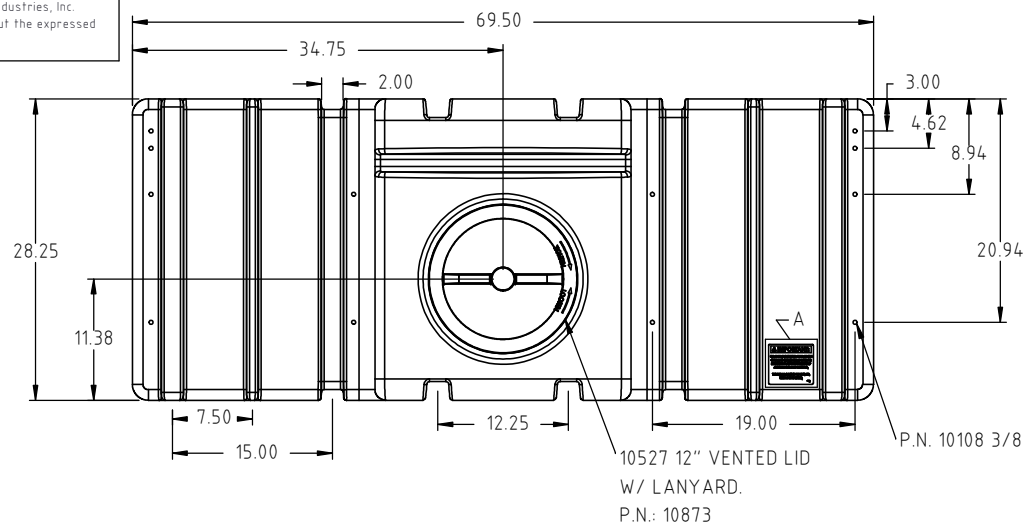


IMPORTANT:

USE AT LEAST SIX INSERTS ON EACH SIDE OF TANK TO SECURE FRAME WORK OR MOUNTING PLATE FOR ENGINE/PUMP AND HOSE REEL IF SO EQUIPPED.

TORQUE ALL BOLTS TO 12-15 FT. LBS. WITH LOCK WASHERS.

14723

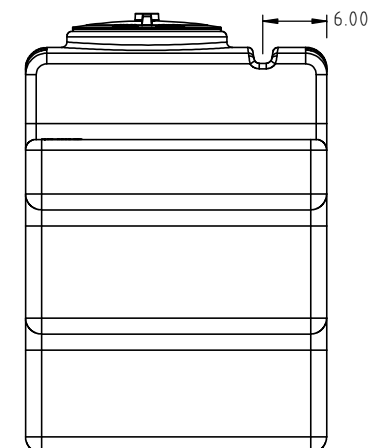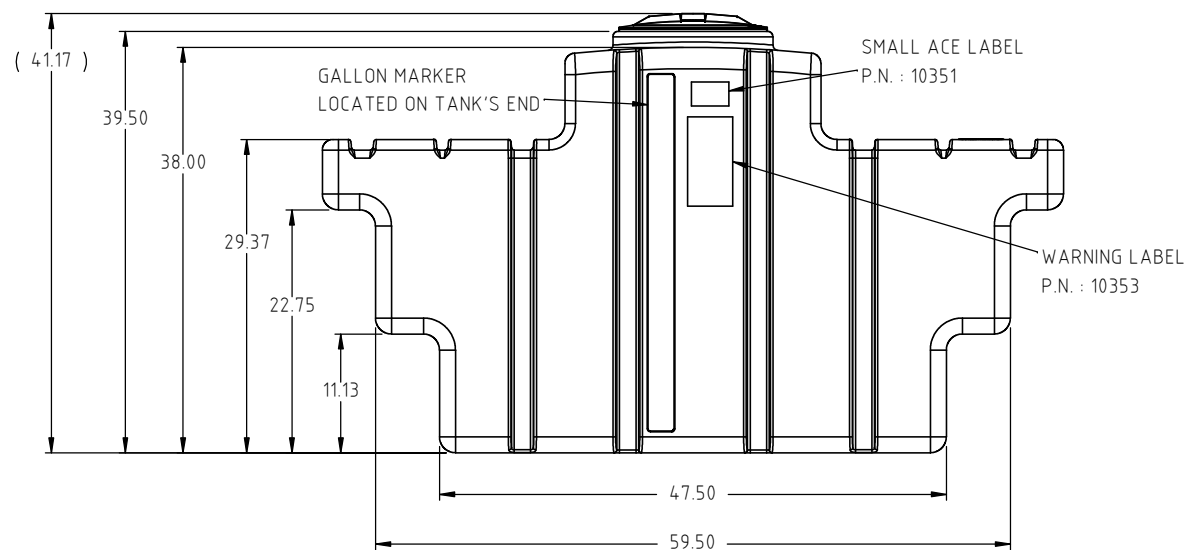

REV	DESCRIPTION	BY / DATE	CCN	DRAWN / DATE	MATERIAL
				ADH 8/18/17	14575 1.7 MELT NATURAL
				APPROD. / DATE	
				REH 8/18/17	
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED				SHOT WEIGHT:	118.0 LBS.
POLYETHYLENE				SHIPPING WEIGHT:	120.0 LBS.
METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1°				FINISH:	
±1% @ 68°F					
THIRD ANGLE PROJECTION ANSI 14.5M				NOTES:	1. .325 WALL



Den Hartog
INDUSTRIES, INC.

Ace Roto-Mold Injection Molding Blow Molding Sowjoy

4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425

DESCRIPTION	
200 GALLON SPACE SAVER TANK	
SCALE	PART NO.
N.S.	SSPU0200-70