

MODEL TD Control Panel

Single phase, simplex timed dosing pump control.

The Model TD control panel provides a reliable means of controlling one single phase pump in onsite septic installations. A programmable timer activates a magnetic motor contactor to turn the pump on and off. A low level cutout float overrides the timer to prevent the pump from running dry. An alarm float activates the audio/visual alarm system indicating a high liquid level. Common applications include sand filter systems, pressure distribution systems, mound systems, or any application requiring a timed dose.

PANEL COMPONENTS


1. **Enclosure** measures 10 x 8 x 4 inches (25.40 x 20.32 x 10.16 cm) NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use).
2. **Magnetic Motor Contactor** controls pump by switching electrical lines.
3. **HOA Switch** for manual pump control.
4. **Control Fuse**
5. **Alarm Fuse**
6. **Float Switch Terminal Block**
7. **Incoming Power Terminal Block**
8. **Programmable Timer** with separate variable controls allows for setting the on and off times from .05 seconds to 30 hours.
9. **Circuit Breaker** provides pump disconnect and branch circuit protection.
10. **Spare Fuse**
11. **Backplate Label** includes diagram of float, pump, and power connections.
12. **Ground Lug**

NOTE: Timer Installation Label and Pump/Float Switch Installation Specification Label are located inside the panel on enclosure cover.

STANDARD ALARM PACKAGE

13. **Red Alarm Beacon** provides 360° visual check of alarm condition.
14. **Alarm Horn** provides audio warning of alarm condition (83 to 85 decibel rating).
15. **Exterior Alarm Test/Normal/Silence Switch** allows horn and light to be tested and horn to be silenced in an alarm condition. Alarm automatically resets once alarm condition is cleared.
16. **Horn Silence Relay** (mounted under bracket).

NOTE: other options available.

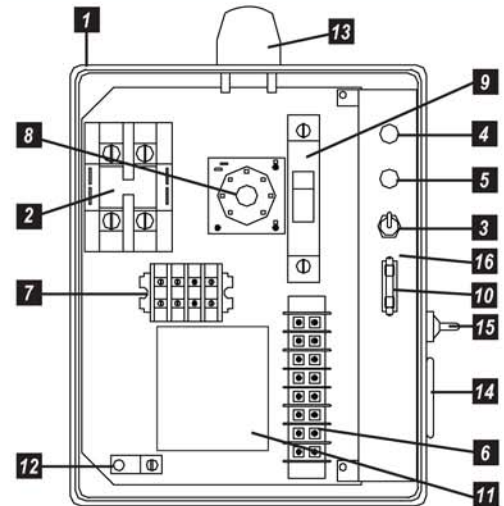

Model Shown TD1W914X


FEATURES

- Entire control system (panel and switches) is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes two 20' SJE PumpMaster® pump switches
- Complete with step-by-step installation instructions
- Three-year limited warranty



3 Fairfield Boulevard, Wallingford, Connecticut 06492
Office: 1-877-765-9565 Fax: 203-284-8514
email: sales@polylok.com
Web site: www.polylok.com

SEE BACKSIDE FOR COMPLETE LISTING OF AVAILABLE OPTIONS.

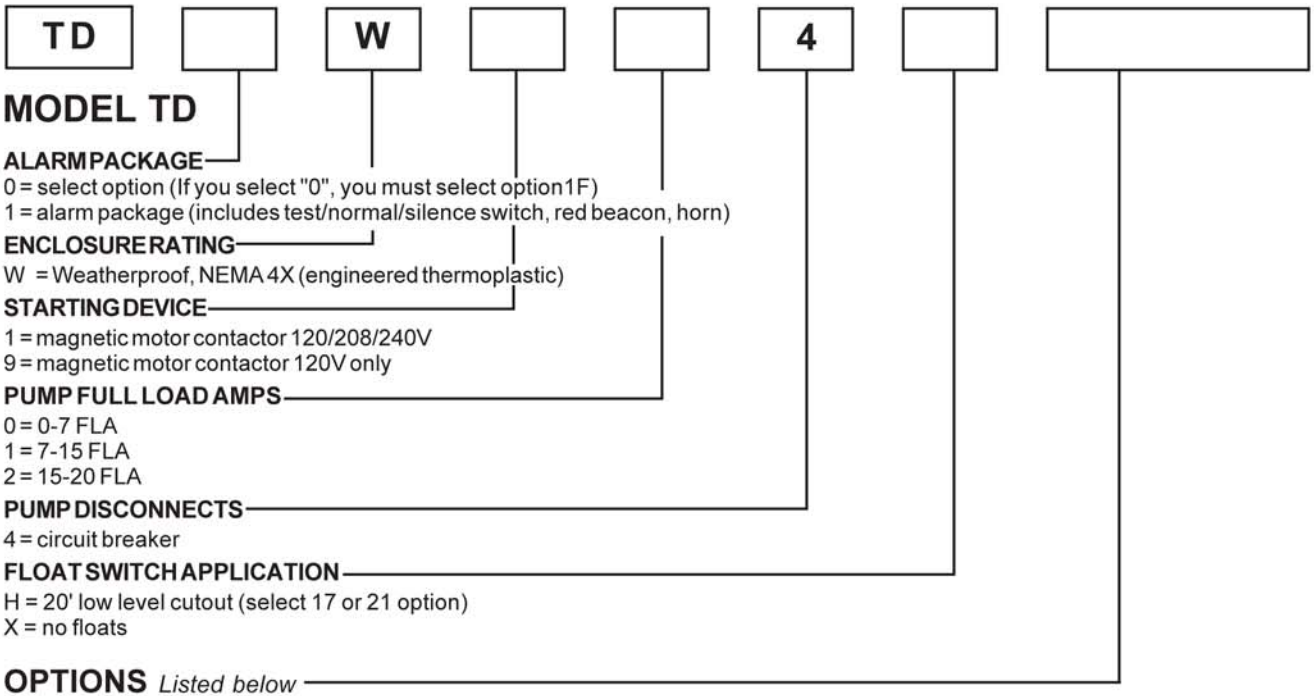

If additional features are required, call the factory for a quote on an Engineered Custom control panel.

- | CODE | DESCRIPTION |
|-----------------------------|---|
| <input type="checkbox"/> 1F | Door mounted alarm indicator with horn and test/normal/silence switch
<i>(must select "0" as an alarm package)</i> |
| <input type="checkbox"/> 4B | Redundant off, alarm activation, red indicator light
<i>(must select option "4D" if floats included)</i> |
| <input type="checkbox"/> 4D | Redundant off float |
| <input type="checkbox"/> 4E | Redundant off float, alarm activation
(20' SJE PumpMaster® SPDT) |
| <input type="checkbox"/> 6A | Normally open dry auxiliary alarm contacts |
| <input type="checkbox"/> 8A | Elapsed time meter |
| <input type="checkbox"/> 8C | Event (cycle) counter |

- | CODE | DESCRIPTION |
|------------------------------|--|
| <input type="checkbox"/> 10E | Lockable latch |
| <input type="checkbox"/> 10K | Anti-condensation heater |
| <input type="checkbox"/> 16A | 10' cord in lieu of 20' <i>(per float)</i> |
| <input type="checkbox"/> 16B | 15' cord in lieu of 20' <i>(per float)</i> |
| <input type="checkbox"/> 16C | 30' cord in lieu of 20' <i>(per float)</i> |
| <input type="checkbox"/> 16D | 40' cord in lieu of 20' <i>(per float)</i> |
| <input type="checkbox"/> 17E | Sensor Float® Mini (redundant off, high level alarm)
▲ <i>(per float)</i> |
| <input type="checkbox"/> 18A | Timer override float
(20' SJE PumpMaster®) ● |
| <input type="checkbox"/> 19X | Externally mounted pump run indicator |
| <input type="checkbox"/> 21E | SJE PumpMaster® (redundant off, high level alarm)
● <i>(per float)</i> |

● Mechanically-activated ▲ Mercury-activated

SAMPLE

