

RAINWATER COLLECTING SYSTEM

USER INSTRUCTIONS

Please read this information carefully to unpack and setup your rainwater collection system properly and avoid injury and product damage. You are responsible for operating the product properly and safely.

Unpacking:

JUN 2008 REV. 0



Open the box carefully. Do not use a sharp object to open the box.



Note the cord attached to the lid.



Unscrew the access cover. Note the arrow markings on the cover for proper rotation.



Note the downspout and leaf catcher box attached to the cord.



Carefully remove the downspout and lift the catcher box from the tank; set aside.




Remove the submersible pump from the tank. Pull the pump out using the flexible hose.



Remove the pump from the box. Save the documentation for future reference.



Place the pump back into the tank as shown. Ensure that the flexible hose is also inside of the tank.

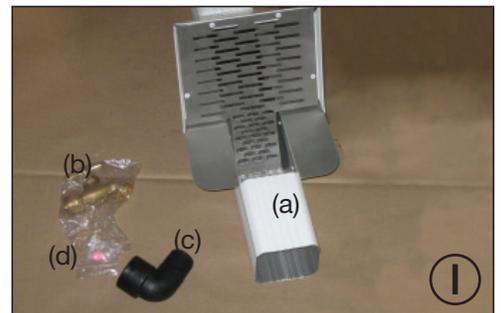

Open the leaf catcher box and ensure it has the following items: (a) leaf catcher, (b) brass spigot, (c) overflow elbow and (d) a small roll of teflon tape.



RAINWATER COLLECTING SYSTEM USER INSTRUCTIONS

Please read this information carefully to unpack and setup your rainwater collection system properly and avoid injury and product damage. You are responsible for operating the product properly and safely.

JUN 2008 REV. 0

Setup:



Using the provided roll of teflon tape wrap the threads of both the spigot and the overflow elbow.




Attach the spigot to one of the ends and hand tighten. Using an adjustable wrench tighten the spigot another full rotation after hand tightening.



Attach the overflow elbow to the other end and hand tighten.



Place the access cover in place and lock into position.

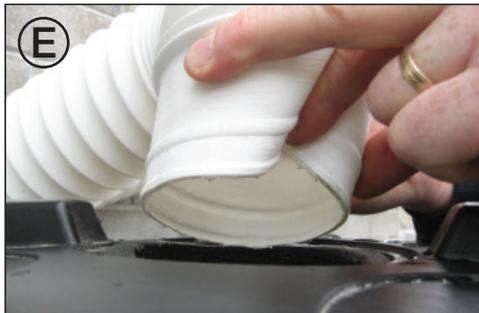

Crimp or fold the round end of the downspout and fit it to the hole in the access cover; the downspout should stay in place when released.



Cut the existing downspout to roughly 5-1/2 ft. from the ground. Place the leaf catcher in position. Using a 1/8" drill bit, drill through both.



Using the provided screws attach the leaf catcher to the downspout. Use two screws at this connection.



Place the flexible downspout in position, drill and attach it using the provided hardware. Use two screws at each this connection.

Please Contact RTS Companies for any questions or concerns

RTS Companies Inc.

650 Rupert Street, Waterloo

Ontario N2V 2R8

1-800-663-2803